



# SafeLite®

## Order Form

Date: \_\_\_\_\_

P.O. #: \_\_\_\_\_

Company: \_\_\_\_\_

Phone: \_\_\_\_\_

Contact: \_\_\_\_\_

Date Required: \_\_\_\_\_

Project Name & Location: \_\_\_\_\_

Ship to Location: \_\_\_\_\_

SafeLite is classified by Underwriters Laboratories, Inc. for use in the fire rated floor and roof-ceiling designs listed:

Floor-Ceiling Designs: Design Nos. D010, D216, D219, G234, G258, G523, G526, J202 & L006


Roof-Ceiling Designs: Design Nos. P207, P228, P230, P237 & P267

Standard Light Fixture Quantity

CANS and Non Standard Fixture

2'x4'	2'x2'	Required Inside Cover Dimensions			Quantity
		L"	W"	H"	N.A.

Standard Fixture Profile Dimensions

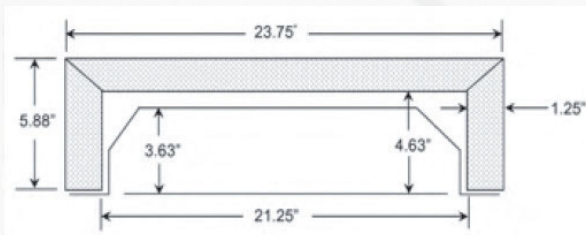

### Notes:

- When ordering can light or non standard covers provide accurate fixture dimensions. Include specific manufacturer required air space clearance for non IC rated lights to ensure correct SafeLite sizing.
- Typical lead time 7-10 days ARO.
- It is the installer's responsibility to review specific U.L. ceiling design.

For additional information scan here



[www.spi-co.com](http://www.spi-co.com)