

Features:


- Easy to apply
- An aggressive all-weather acrylic adhesive system
- Tear resistant
- Puncture resistant
- Performs well over a wide range of environmental conditions
- Durable vapor barrier
- Excellent self adhesion
- Superior resistance to UV exposure, weather and mold
- White, Silver, Black
- Embossed Finish

Application:

Application surface must be clean, dry and free of contaminants
 Apply pressure with plastic squeegee. Tape all seams with the coordinating Proline Plus™ jointing/seaming tape and apply pressure with squeegee.

Shelf Life & Storage:

Under ideal storage conditions of 60°F to 80°F and low humidity, shelf life is one year from date of purchase.

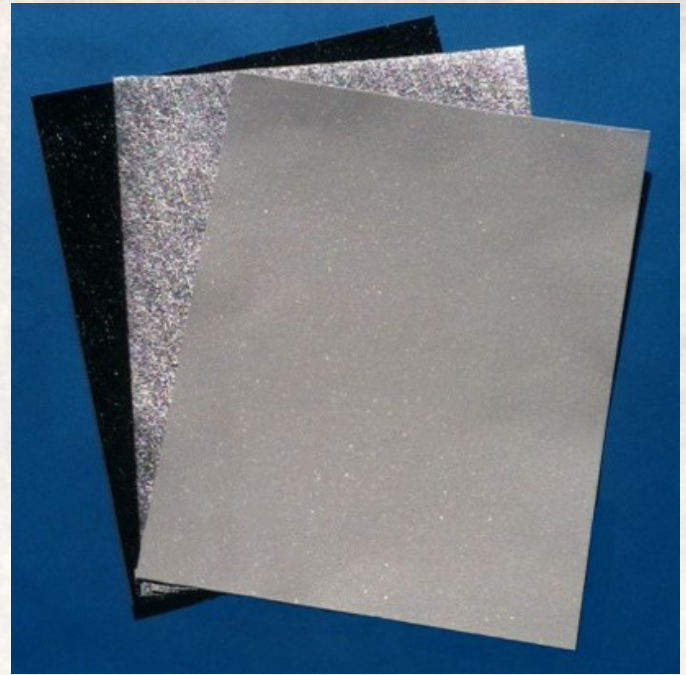

Performance Data

Test	Typical Values (English)	Typical Values (metric)	Test Method
Total Thickness without Liner	10.2 mils	0.259-mm	PSTC-133
Peel Adhesion to Stainless Steel	75-oz/in	20.9-N/25mm	PSTC-101
Self Seal Peel Adhesion	65-oz/in	18.7-N/25mm	PSTC-101
Shear Adhesion	>72 hours @2.2psi	>72 hours @ 15.2kPa	PSTC-107
Tensile Strength	70-lbs/in	318-N/25mm	PSTC-131
Elongation	83%	83%	PSTC-131
Permeance	0.00 perms	0.00 perms	ASTM E 96
Puncture Resistance	43.3-lbs	193-N	ASTM D 1000
Application Temperature Range	-25°F to 248°F	-32°C to 120°C	Mfg. Internal
Minimum Continuous Use Temperature	-40°F	-40°C	Mfg. Internal
Maximum Continuous Use Temperature	270°F	135°C	Mfg. Internal
Surface Burning Characteristics	≤25 Flame < 50 Smoke	≤25 Flame < 50 Smoke	UL 723* ASTM E 84

*Tested in accordance with UL 723

Roll Width	Roll Length	Rolls/Carton
23-in	150-ft	1
30-in	150-ft	1
35.5-in	150-ft	1
46-in	150-ft	1
4-in (tape)	150-ft	12



Performance values and characteristics shown are obtained through recommended test procedures. The listed values do not represent a guarantee of product performance. Values represent nominal and average values; individual roll values may vary from average values indicated on the data sheet. User is responsible for determining suitability and fitness for use.



**SPECIALTY PRODUCTS
& INSULATION**

SPI LLC
2101 Rexford Road, Suite 300E
Charlotte, NC 28211
Phone: (855) 519-4044
Web: www.spi-co.com
E-mail: fabteam@spi-co.com



Please ask your Sales Representative about our other products and services.