


SafeLite® ORDER FORM

		DATE
COMPANY	CONTACT	PHONE
PROJECT NAME & LOCATION		DATE REQUIRED
SHIP TO LOCATION		P.O. NUMBER

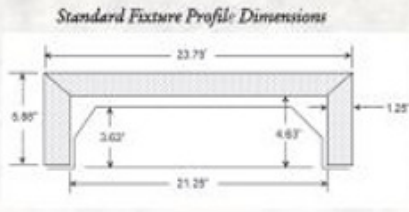

STANDARD FLUORESCENT LIGHT FIXTURE QUANTITY		CANS AND NON STANDARD FLUORESCENT FIXTURE			
2'x4'	2'x2'	Required Inside Cover Dimensions			Quantity
		L"	W"	H"	N.A.

Notes

- When ordering can light or non standard fluorescent covers provide accurate fixture dimensions. Include specific manufacturer required air space clearance for non IC rated lights to ensure correct SafeLite sizing.
- All covers are produced as 5 sided unless specified otherwise.
- Typical lead time 7-10 days ARO.
- It is the installer's responsibility to review specific U.L. ceiling design and prepare any vent opening.

SafeLite (mineral wool board, faced) Physical Properties:
 Maximum service temperature 1200°F
 Melt point > 2000°F

Thermal Resistance:
 ASTM C 518 (C177) R value/inch @ 75°F 4.2 (R value 5.25 @ 1-1/4" thick)

Fire Performance:
 ASTM E 136 Behavior of Materials at 750° C (1382 °F) Non-Combustible
 ASTM E 84 Surface Burning Characteristics Flame Spread 25
 Smoke Developed 0

SafeLite covers are fabricated from material which is approved for use by the New York City Dept. of Building, Report of Materials and Equipment Acceptance Division under MEA 210-82-M Vol. 2.

Acoustical Performance:
 ASTM C 423 NRC = 1.00 at 2" thick
 ASTM E 1414 CAC- Two Room Transmission Loss, AL 20 (TM 418)
 1.) A high performance ceiling no light fixtures, CAC 44.
 2.) The same ceiling with 2-2x4 light fixtures, CAC 41.
 3.) The same ceiling with SafeLite on the 2x4 light fixtures, CAC 45 (A 4db improvement over unprotected lights).
 Note: A 3db (decibel) change sounds half as loud as the original noise.

SafeLite is classified by Underwriters Laboratories, Inc. for use in the fire rated floor and roof-ceiling designs listed below:

- Floor-Ceiling Designs: Design Nos. D010, D216, D219, G230, G234, G258, G523, G526, J202 and L006
- Roof-Ceiling Design: Design Nos. P207, P228, P210, P237 and P267



SPI Specialty Products & Insulation
 c/o Dune Point Capital
 411 Theodore Fremd Ave.
 Rye, NY 10580
 Phone: (855) 519-4044
 Web: www.spi-co.com
 Email: fabteam@spi-co.com
 Nov 2018 - SafeLite

Disclaimer and Limitation of Warranty: The purchaser/user is advised to consult with the appropriate professionals and to read the manufacturer's product information to determine the adequacy or appropriateness of the product for the use intended. SPI makes no claim or representation regarding the use or applicability of the products. Further, SPI makes no warranty, expressed or implied, and disclaims all warranties including warranties of merchantability and fitness for a particular purpose.

For additional information please visit
<http://www.spi-co.com>

Please ask your Sales Representative about our other fabrication products and services.