



Specialty Products
and Insulation

332 AA Mineral Wool Hull Board

Navy Cloth Facing

Description

332 AA Mineral Wool Hull Board is composed of semi-rigid mineral wool insulation board made from basalt rock and slag with durable white fiberglass cloth facing system that can be painted. The non-combustible, mineral wool board offers fire, thermal and acoustical performance for a variety of marine applications.

The product provides A-60 ratings for bulkhead, deck and associated stiffeners. Also, with a 1200°F maximum continuous use temperature (melt point ~ 2150°F) the product can be applied to boilers, ovens, exhaust stacks, duct and tanks on workboats, ferries, cruise ships, military vessels, and offshore platforms.

Specifications

* Approved as meeting Parts 2 and 5 of Annex 1 of the IMO FTP code by the U.S. Coast Guard per 164.112/133/0

* U.S. Coast Guard: 164.109/164.107/164.112

* 3" thick for A-60 Class Steel Bulkhead, 1 1/2" on Stiffeners

* 2" thick for A-60 Class Steel Deck, 1 1/2" on Stiffeners

Advantages

Fire Performance - noncombustible core with A-60 qualified fire performance.

Thermal Insulation - Effective insulation system (R Value 4.2 per inch) minimizes heat transfer / energy loss providing a more comfortable, energy efficient environment.


Quality Control - Panels are produced in compliance with an established quality control program, under follow-up service with Intertek Testing Services NA Ltd., a qualified independent third party inspection agency. This ensures consistent, high quality finished materials.

Acoustics - Aids with environmental sound control.

Light Reflectance - Bright white finish provides improved illumination for interior environments which can reduce energy consumption.

Installation

332 AA Mineral Wool (Navy Cloth) Hull Board is easy to cut and fit and installs with appropriate insulation pins, clips and tape.

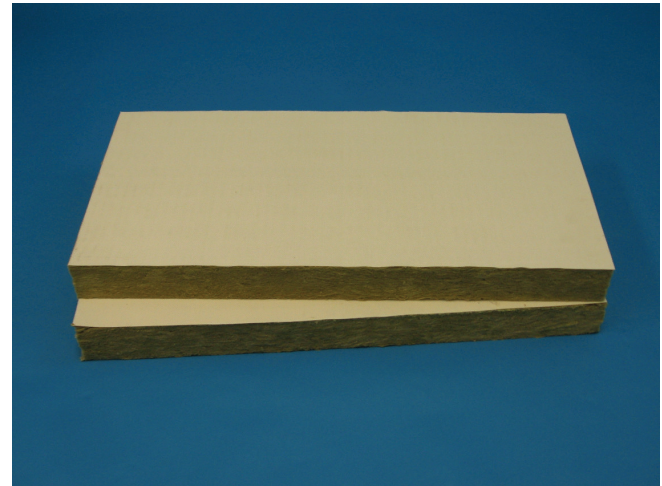

Availability

Standard Sizes:

1" x 24" x 48" at 96 sf/ctn 2" x 24" x 48" at 48 sf/ctn

1.5" x 24" x 48" at 64 sf/ctn 3" x 24" x 48" at 32 sf/ctn

332 AA Mineral Wool Hull Board is available through SPI service centers nationally. Call or visit our website to locate one near you.

Performance Compliance Data

Facing: color white, Glass cloth, 14.95 oz. / sq. yd. complies with Mil-C-20079 Type 1 Class 2

Base Board:

Operating Temperature Limit - (ASTM C411): 1200°F (649°C)

Nominal Density - 6 lb / ft³ Other densities available (4-10 lb)


Thermal Conductivity - per test method ASTM C 177 & C 518 with C 1045 calculations

Fungi Resistance - (ASTM C665): Does not promote growth

Base Board SCS Certified - minimum 25% Recycled Content

Sound Absorption Coefficients


Acoustical Performance		ASTM C423							6 / 8 lb Acoustical Data	
		CO-EFFICIENTS AT FREQUENCIES								
Thickness		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC		
1.0"		0.08 / 0.11	0.33 / 0.31	0.78 / 0.82	1.03 / 1.01	1.02 / 1.02	1.04 / 1.01	0.80 / 0.80		
1.5"		0.17 / 0.21	0.62 / 0.64	1.00 / 0.92	1.05 / 1.00	1.01 / 0.95	1.01 / 1.01	0.90 / 0.90		
2.0"		0.32 / 0.43	0.81 / 0.78	1.06 / 0.90	1.02 / 0.97	0.99 / 0.97	1.04 / 1.00	0.95 / 0.90		
3.0"		0.78 / 0.75	0.89 / 0.82	1.04 / 0.89	0.98 / 0.94	1.01 / 1.00	1.02 / 1.00	1.00 / 0.90		



Note: properties as reported by base board manufacturer



Products Produced Under
Lab Follow-Up Service



1408/12

332 AA Mineral Wool Hull Board (Navy Cloth) Quote / Order Form

		DATE
COMPANY	CONTACT	PHONE
PROJECT NAME & LOCATION		DATE REQUIRED
SHIP TO LOCATION		P.O. NUMBER

332 AA Mineral Wool Hull Board (Navy Cloth)	Board Size (inches & Sq. Ft.)			
	Thickness	Width	Length	SF
Accessories	Length	Size	Diam.	Qty.
Insulation Stick Pin				
White Navy Washers				
Std. Lock Washers				
Joint Tape			Roll	

Note: Final quantities rounded to full carton or packaged quantities.





Specialty Products
and Insulation

SPI Specialty Products & Insulation
2101 Rexford Rd., Suite 300 E
Charlotte, NC 28211
Phone: (855) 519-4044
Web: www.spi-co.com
E-mail: fabteam@spi-co.com
January 2018 - 322 AA Mineral Wool Hull Board



Disclaimer and Limitation of Warranty. The purchaser/user is advised to consult with the appropriate professionals and to read the manufacturer's product information to determine the adequacy or appropriateness of the product for the use intended. SPI makes no claim or representation regarding the use or applicability of the products. Further, SPI makes no warranty, expressed or implied, and disclaims all warranties including warranties of merchantability and fitness for a particular purpose.

For additional information please visit
www.spi-co.com

Please ask your SPI Sales Representative
about our other fabrication products and
services